
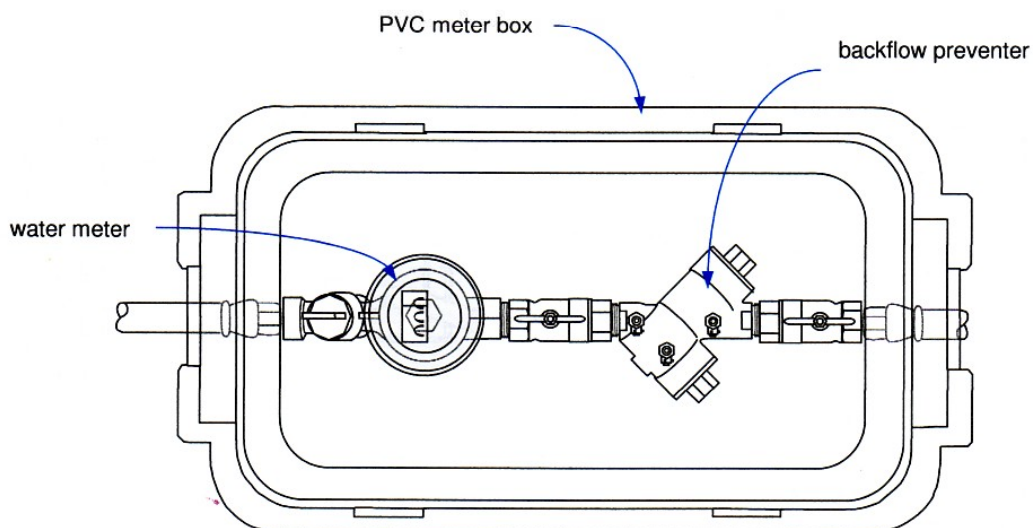


### Low Risk Backflow Preventer

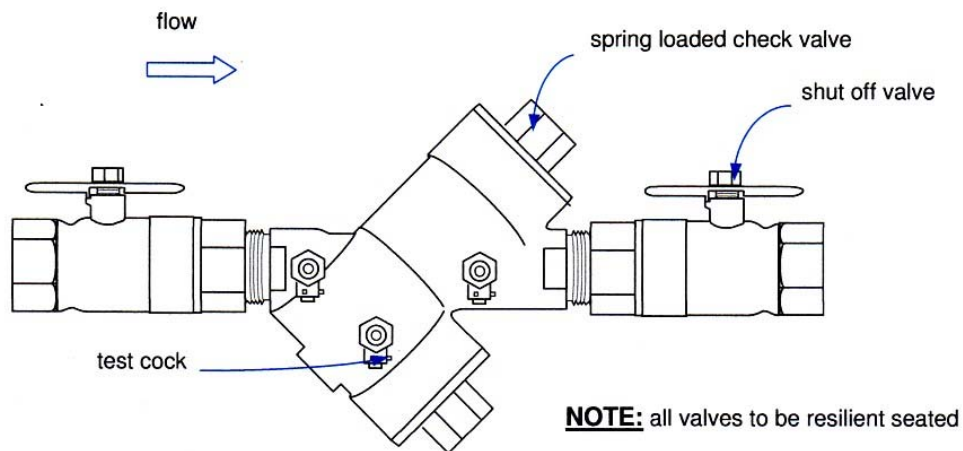

**NOTE: install with a minimum clearance of 300mm from finished grade and provide 150mm of clean drainage metal install with adequate side clearance for testing and maintenance install adequate support blocks protect from freezing**

**Drawing WS 03**